

WPT : LED Wallpack, Trapezoid



project name	type G
catalog number	
comments	voltage
approved by	date

50/80
watts

5500/
8800
lumens

110
lpw

4000K/
5000K
CCT

Features

- Latest generation of LED chips delivers a similar light output to a 175, 250, or 400W metal halide using only 1/3 the energy consumption
- Die-cast aluminum body
- Full cutoff optics prevents neighborhood light trespass; item is night sky friendly
- Heat and impact resistant tempered glass

Performance

- Operating temperature: -40°C (-40°F) to 40°C (104°F)
- UL & CUL listed for wet locations
- IC protection
- 4000K/5000K CCT
- CRI: >70
- Input voltage: 120~277V

Applications

- Industrial Parks
- Loading Docks
- Utility Sheds
- Entryways
- Walkways
- Storage Areas
- Security


Ordering Information

Order Code	Item #	Lm	W	CCT	CRI	Life/Hrs	V	Replaces HID
09812	WPT1-55/840-BZ-U	5,500	50W	4000K	70+	50,000	120-277V	175-250W
09813	WPT1-55/850-BZ-U	5,500	50W	5000K	70+	50,000	120-277V	175-250W
09814	WPT1-88/840-BZ-U	8,800	80W	4000K	70+	50,000	120-277V	250-400W
09816	WPT1-88/840-BZ-V	8,800	80W	4000K	70+	50,000	120-277V	250-400W
09815	WPT1-88/850-BZ-U	8,800	80W	5000K	70+	50,000	120-277V	250-400W
09817	WPT1-88/850-BZ-V	8,800	80W	5000K	70+	50,000	120-277V	250-400W

Accessories (Sold Separately)

Order Code	Litespan Part #	Description
08738	PCB1	Photocontrol, Button Type 120V
08739	PCB2	Photocontrol, Button Type 277V
08865	LP1040-36-C0900	Replacement Driver for WPT-1C-U or WPT-2C-U (WPT-2C-U requires two drivers)
08746	WP-347T	Wallpack Step Down Transformer - 347V


RoHS
Compliant



selection. solutions. simplicity. eiko.com

WPT : LED Wallpack, Trapezoid

Dimensions

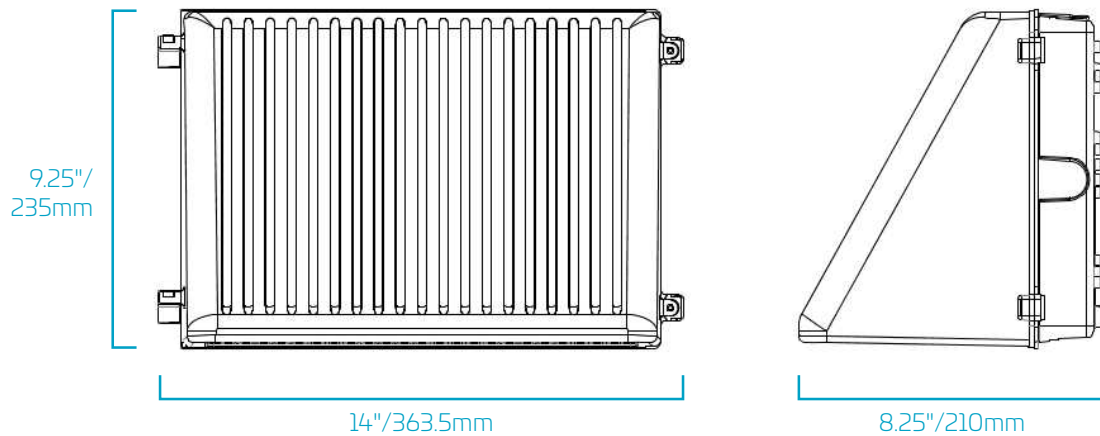

[watch](#) > [like](#) > [follow](#)



23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 · (F) 1.800.492.8975
Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 · (F) 1.888.705.1335